


Link Controls Ltd.

Stuart Road, Manor Park, Runcorn, WA7 1TS
Tel: +44(0)1928 579050 Fax: +44(0)1928 579259
www.link-controls.co.uk sales@link-controls.co.uk

Series 50 Tubular Motors

Small Shutters and Grilles

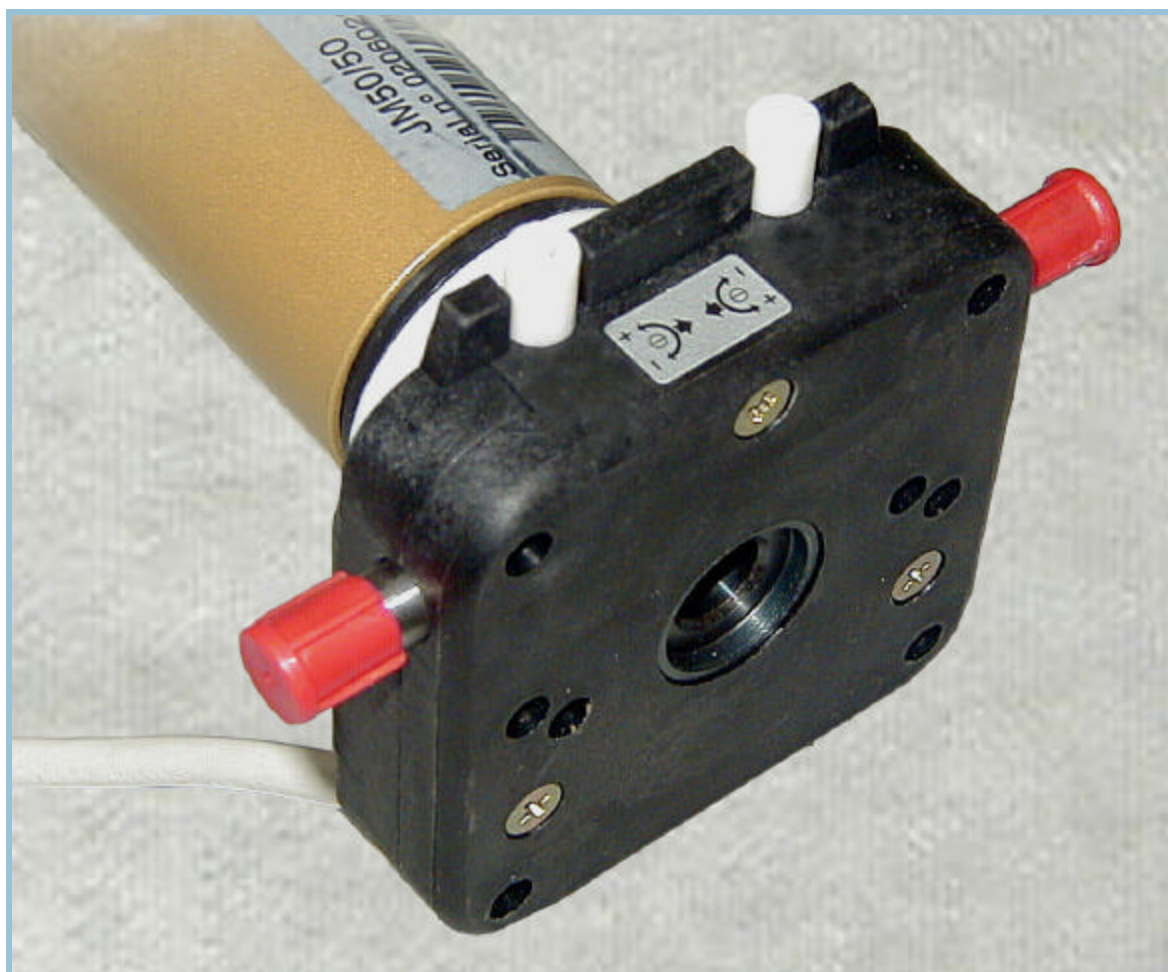

Special Features

- * 230v 1ph 50Hz Motor
- * Integral Thermal Trip
- * Manual Override (FMM)
- * Limit Switches Adjustable by Thumbscrews

PRODUCT DESCRIPTION

The 50 Series tubular motor range includes the models JM 50/15, JM 50/35, JM 50/50 all of which are available with Manual Override (FMM).


The 50 Series is suitable for Blinds, Awnings, Small Grilles and Shutters. For Window Shutters or areas of high security, the 50 Series can be provided without Manual Override (FCH).

TECHNICAL INFORMATION

MODEL	TORQUE NM	SPEED RPM	LIFTING CAPACITY (KG)		POWER WATTS	CURRENT AMPS	LIMIT TRAVEL REVS
			90 TUBE DIA. (MM)	100 TUBE DIA. (MM)			
JM50/15	15	13	20	18	140	0.60	0 : 20
JM50/35	35	13	45	40	220	0.95	0 : 20
JM50/50	50	13	65	60	270	1.15	0 : 20


OPERATOR DIMENSIONS

TYPE:- JM50/15 - 50/15 FCH


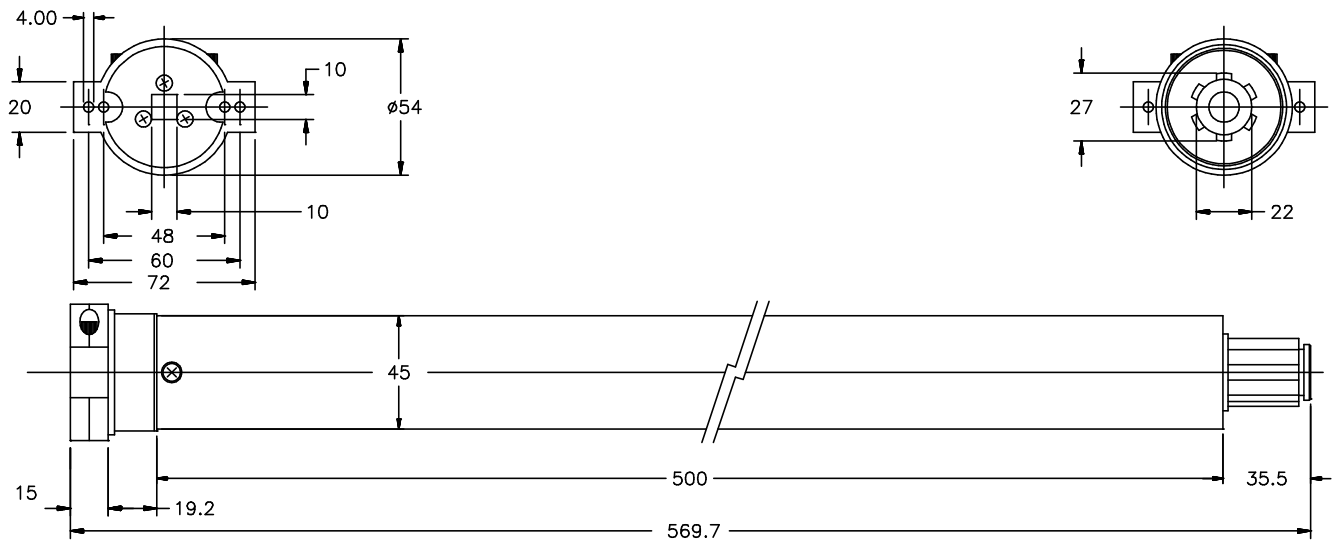


OPERATOR DIMENSIONS

TYPE:- JM50/15 - 50/50 FMM

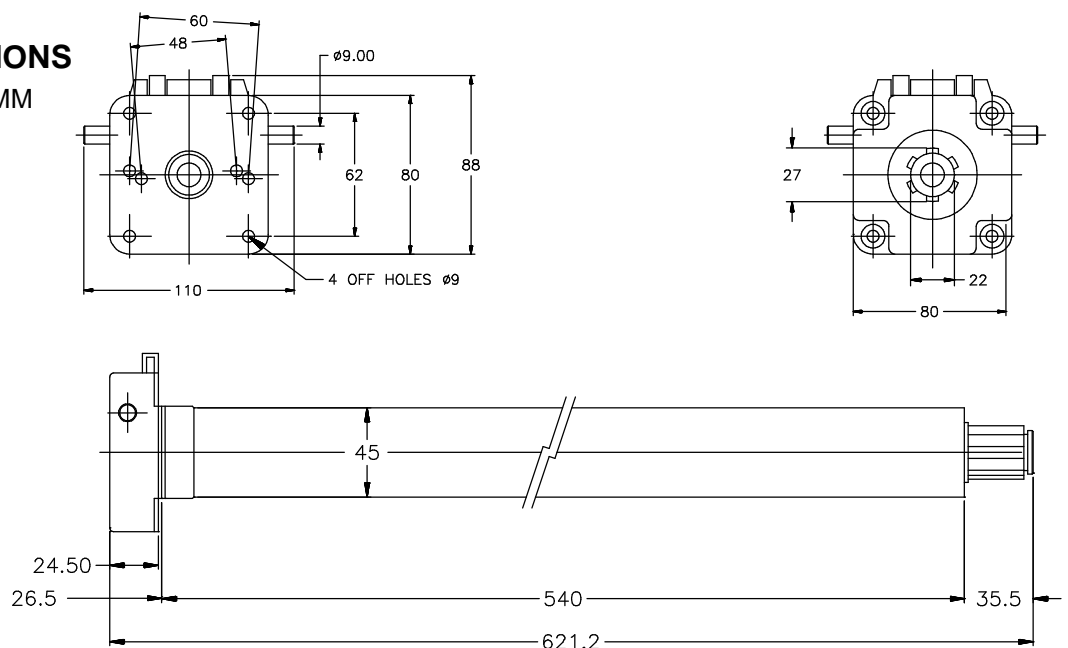

TYPICAL INSTALLATION

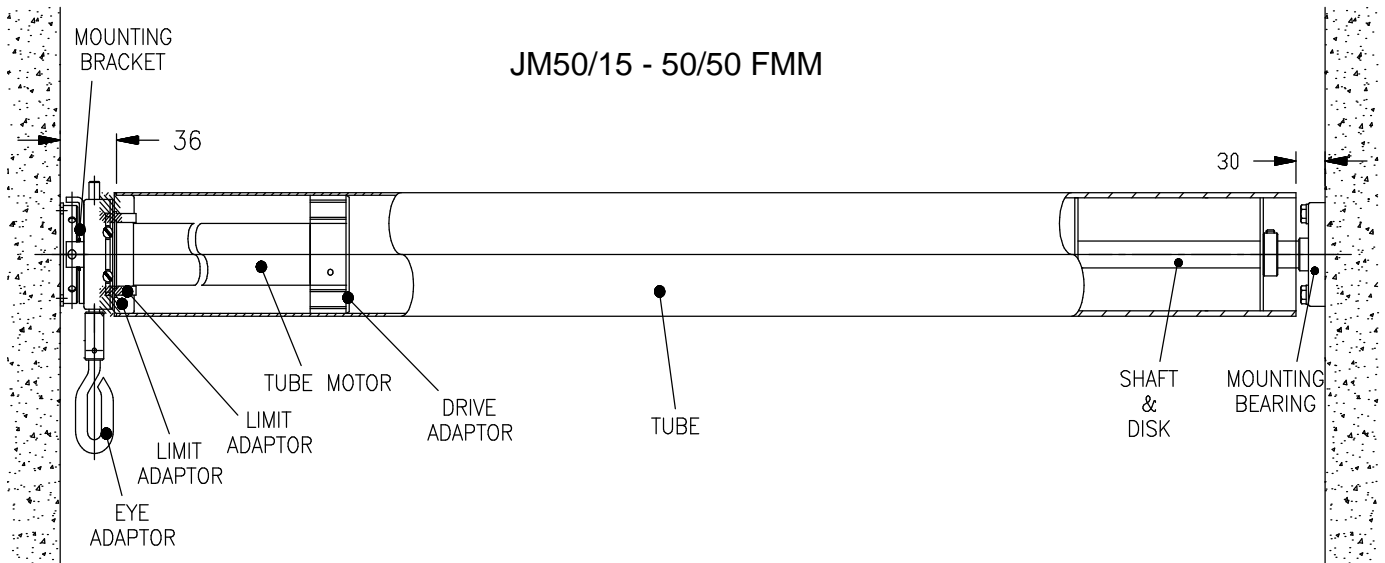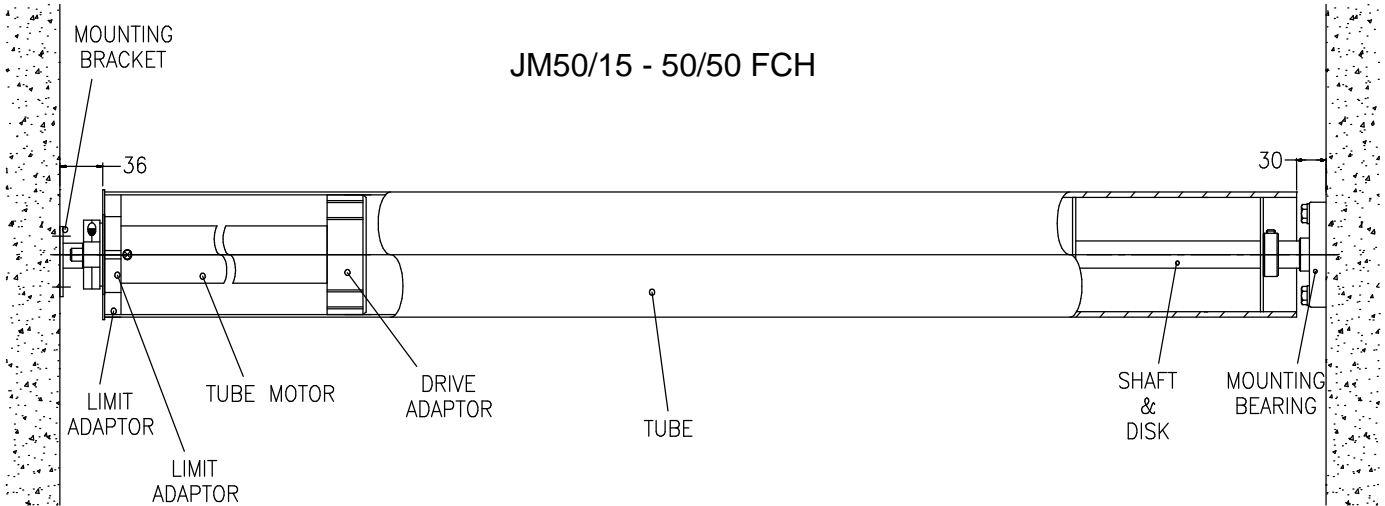


TUBE PROFILES

As standard the Series 5 range is available with adaptors to suit 90 mm or 4" 16 swg tube.


Adaptors for different contoured tubes and other tube profiles are available.

For details contact our Sales Office.

90mm TUBE




4" 16swg TUBE



SELECTION

The Selection Chart given includes for a safety factor of 30%.

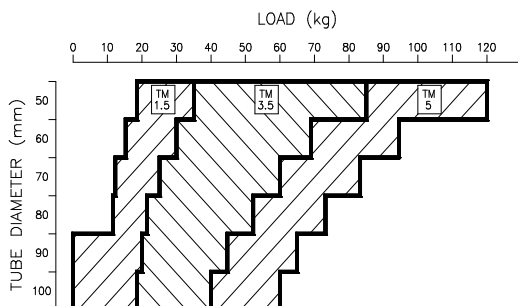

Link Controls Limited
INDUSTRIAL DOOR AND GATE OPERATORS
ACCESS CONTROL & SECURITY EQUIPMENT

Stuart Road, Manor Park, Runcorn WA7 1TS
Tel: 01928 579050 Fax: 01928 579259
Email: sales@link-controls.co.uk
Web: www.link-controls.co.uk