


Link Controls Ltd.

Stuart Road, Manor Park, Runcorn, WA7 1TS
Tel: +44(0)1928 579050 Fax: +44(0)1928 579259
www.link-controls.co.uk sales@link-controls.co.uk

Series 60 Tubular Motors

Medium Shutters and Grilles

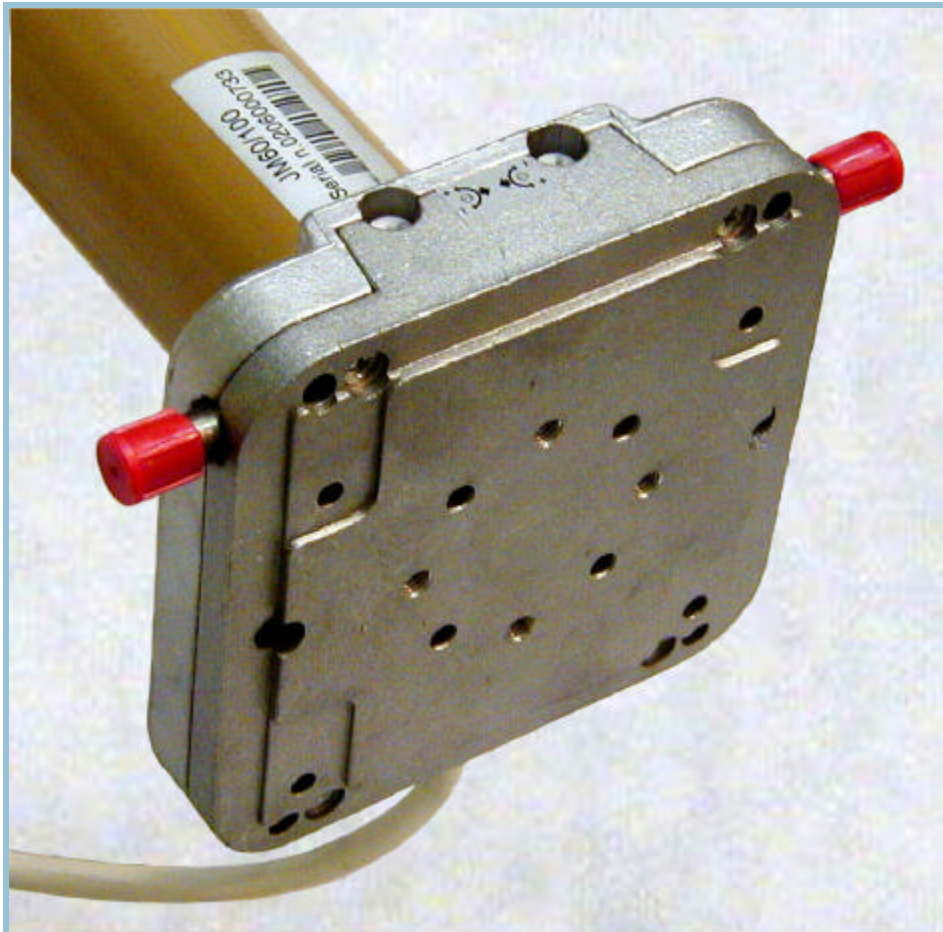

Special Features

- * 230v 1ph 50Hz Motor
- * Integral Thermal Trip
- * Manual Override (FMM)
- * Limit Switches Adjustable by Thumbscrews

PRODUCT DESCRIPTION


The 60 Series tubular motor range includes the models JM60/80, JM60/10, JM60/130 all of which are available with Manual Override (FMM). The 60 Series is suitable for Medium Grilles and Shutters. For Window Shutters or areas of high security, the 60 Series can be provided without Manual Override (FCI).

TECHNICAL INFORMATION

MODEL	TORQUE NM	SPEED RPM	LIFTING CAPACITY (KG)		POWER WATTS	CURRENT AMPS	LIMIT TRAVEL REVS
			90 TUBE DIA. (MM)	100			
JM60/80	80	12	100	95	420	1.90	0 : 40
JM60/10	100	12	130	120	463	2.05	0 : 40
JM60/130	130	12	170	155	657	2.86	0 : 40


OPERATOR DIMENSIONS

TYPE:- JM60/80 - JM60/130 FCI

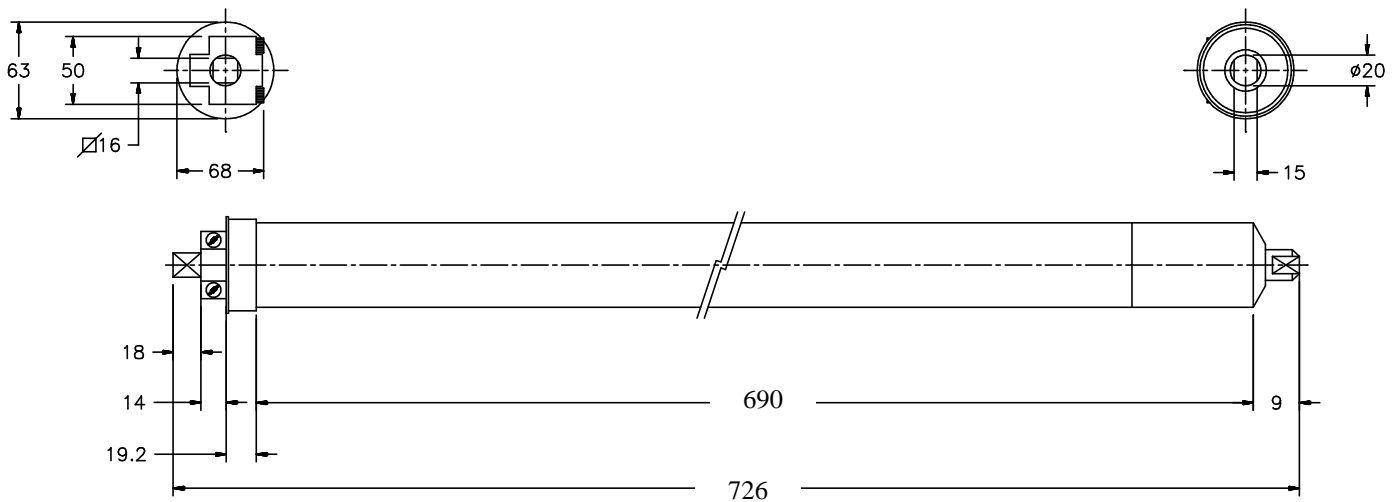


OPERATOR DIMENSIONS

TYPE:- JM60/80 - JM60/130 FMM

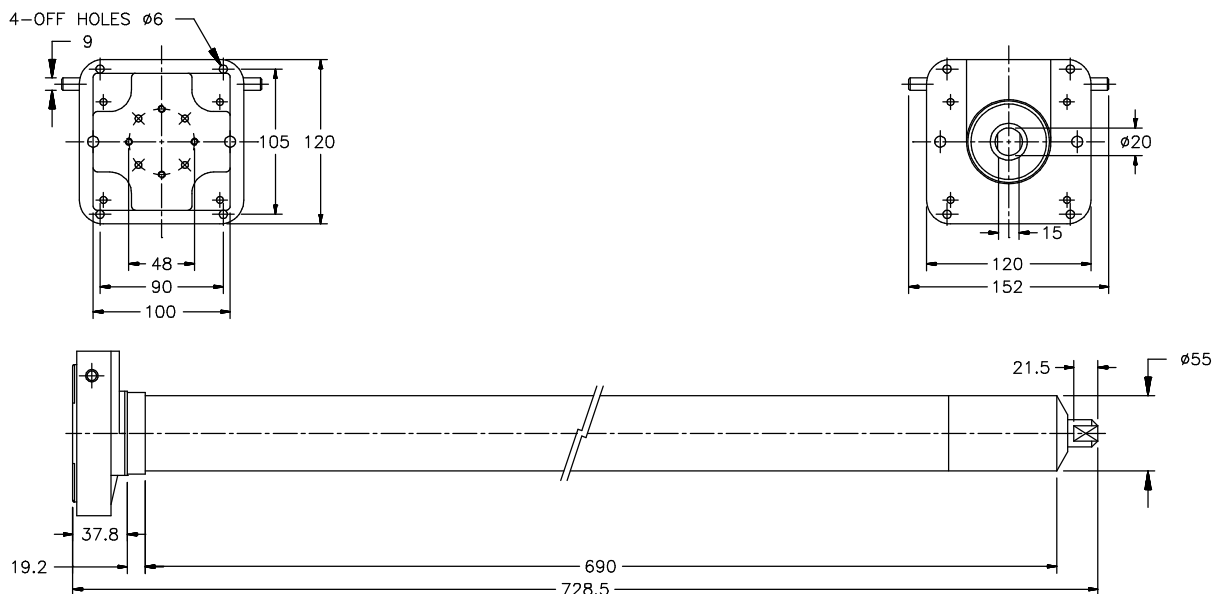

TYPICAL INSTALLATION

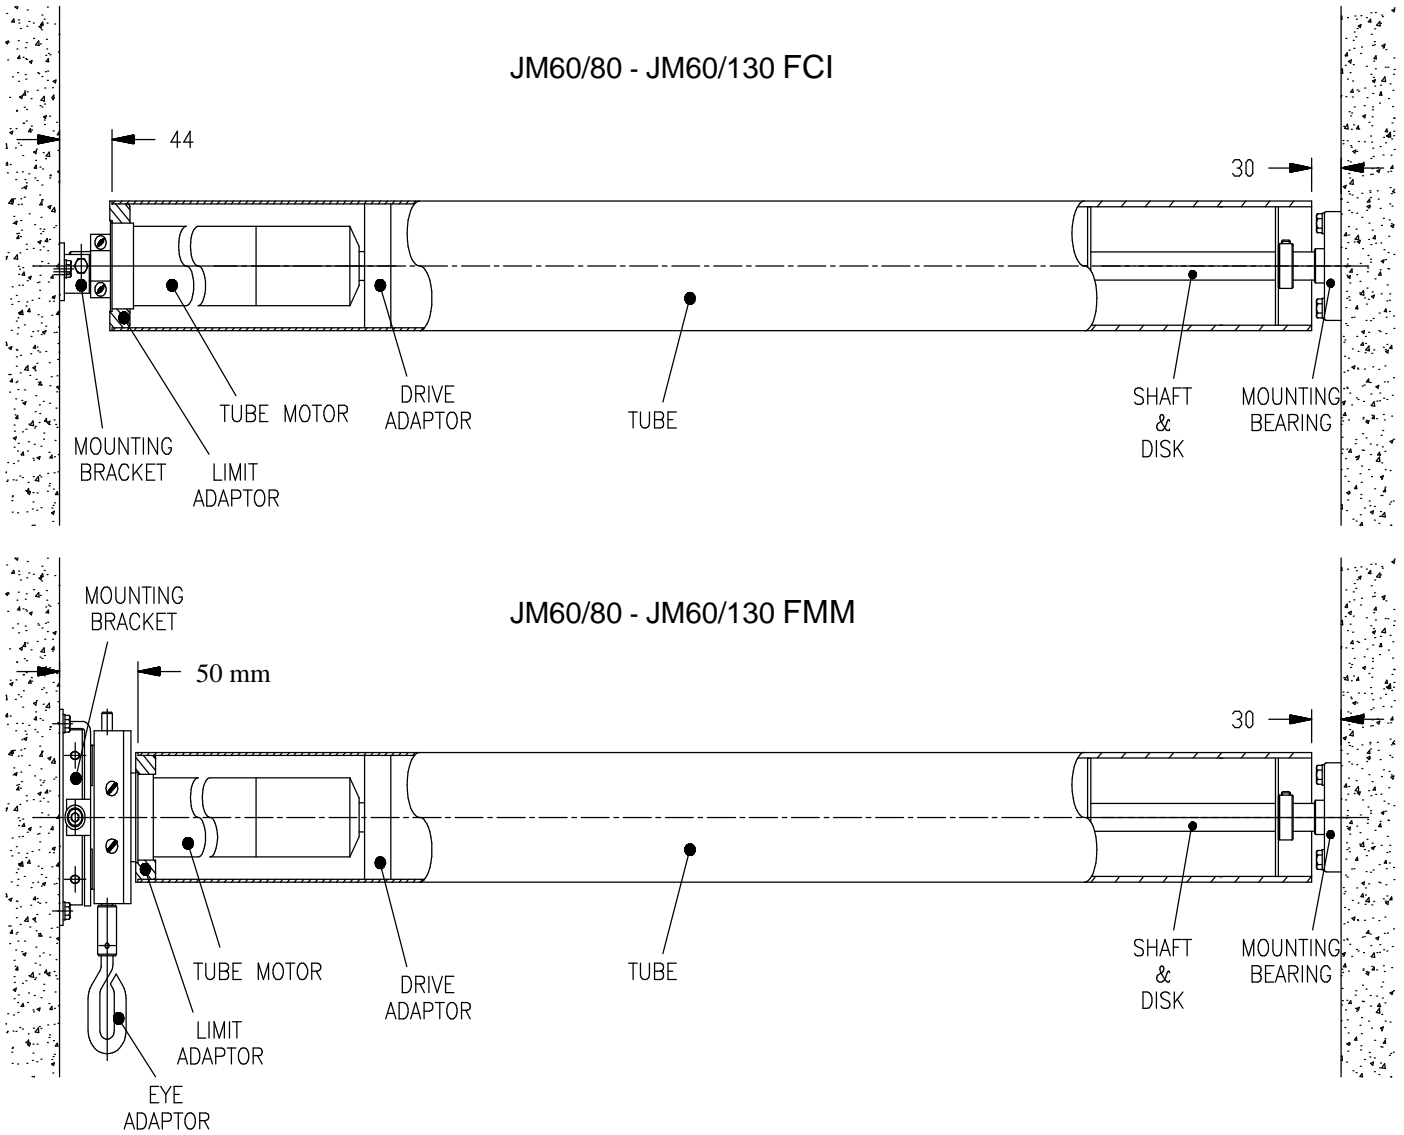


TUBE PROFILES

As standard the Series 6 range is available with adaptors to suit 90 mm or 4" 16 swg tube.


Adaptors for different contoured tubes and other tube profiles are available.

For details contact our Sales Office.

90mm TUBE




4" 16swg TUBE



SELECTION

The Selection Chart given includes for a safety factor of 30%.

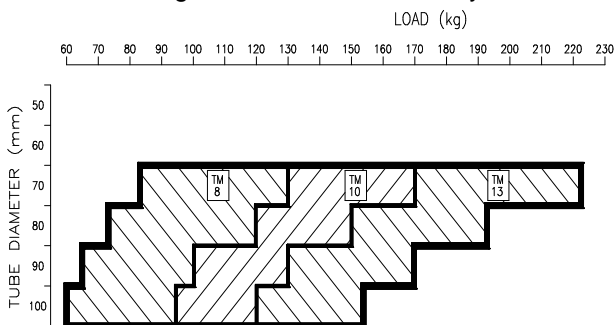

Link Controls Limited
INDUSTRIAL DOOR AND GATE OPERATORS
ACCESS CONTROL & SECURITY EQUIPMENT

Stuart Road, Manor Park, Runcorn WA7 1TS
Tel: 01928 579050 Fax: 01928 579259
Email: sales@link-controls.co.uk
Web: www.link-controls.co.uk