

Link Controls Ltd.

Stuart Road, Manor Park, Runcorn, WA7 1TS

Tel: +44(0)1928 579050


Fax: +44(0)1928 579259

www.link-controls.co.uk

sales@link-controls.co.uk

TVRAD-6

Direct Drive Operator

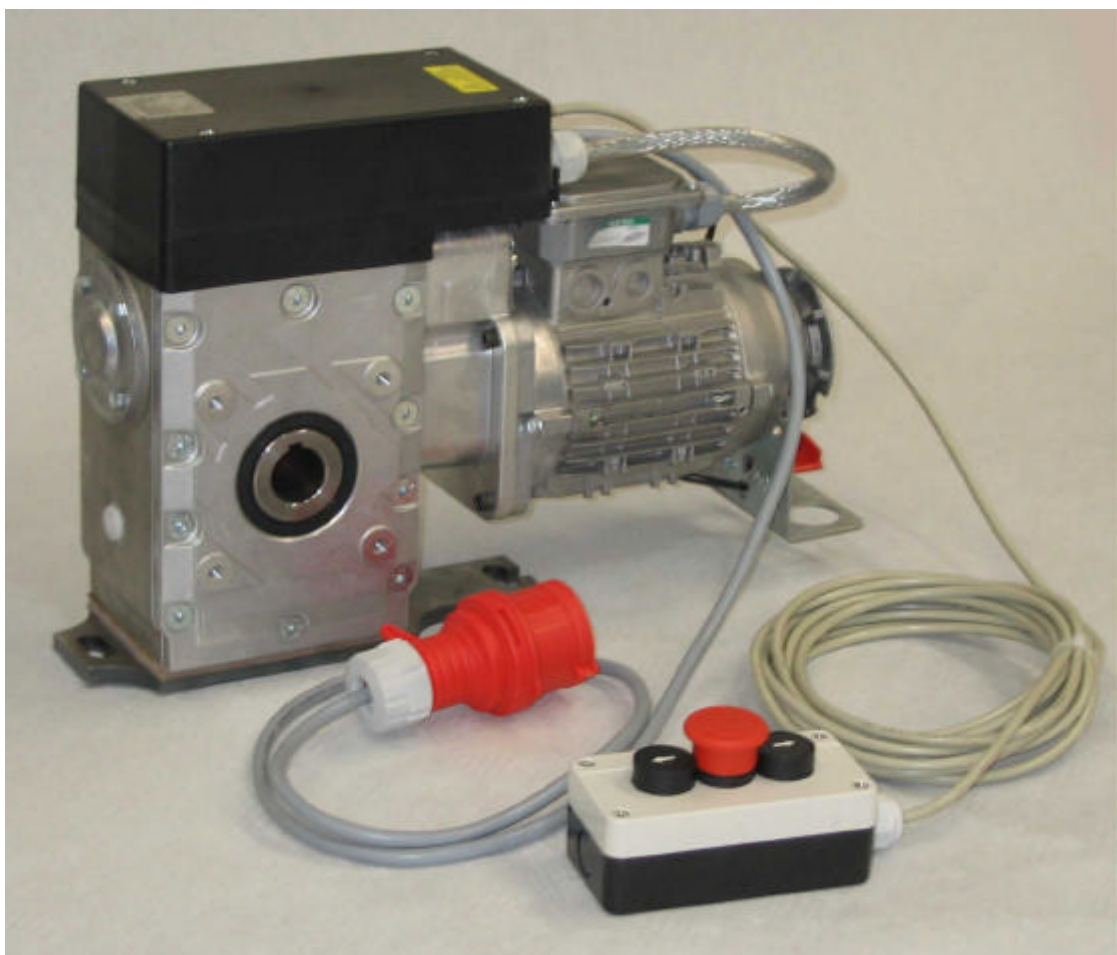

Special Features

- * Integral Safety Gear
- * Hand Crank System, High Level Hand Chain System
- * Safety Interlock Switch for Manual Operation
- * Integral Thermal Protection
- * I.P. 54 Environment Protection
- * Gear Driven Limit Switches
- * Phosphor Bronze Worm Wheel
- * High starting Torque—Industrial Duty Motor

The TVRAD-6 Un-Sprung Rolling Door Operator is supplied with a 0.55 kw, 400v Three Phase Motor. This model can be fitted with a Hand Crank or High Level Hand Chain System which enables the roller shutter door to be manually opened & closed when required.

Data \ Type	TVRAD-6 c/w Hand Crank	TVRAD-6 c/w High Level Hand Chain	Bracket Packs
Power (kW)	0.55		
Output Speed (R.P.M.)	12		
Environmental Protection	I.P.54		
Current (Amps)	2.0		
Power Supply	400v/3ph/50Hz		
Order Code	21-0675	21-0676	29-3050

Lifting Capacities for Unsprung **STEEL LATH** Rolling Shutters (Max height 6M)

Tube Dia., mm	101	127 mm	139 mm	152 mm	168 mm
Lifting Weight, kg	375	300	270	250	225

Lifting Capacities for Unsprung **INSULATED LATH** Rolling Shutters (Max height 6M)

Tube Dia., mm	127 mm	139 mm	152 mm	168 mm	203 mm
Lifting Weight, kg	250	225	210	190	n/a

OPERATOR DIMENSIONS

TYPE:- High Level Hand Chain

