

# Link Controls Ltd.

Stuart Road, Manor Park, Runcorn, WA7 1TS

Tel: +44(0)1928 579050


www.link-controls.co.uk

Fax: +44(0)1928 579259

sales@link-controls.co.uk

## TVRAD-8

Direct Drive Operator

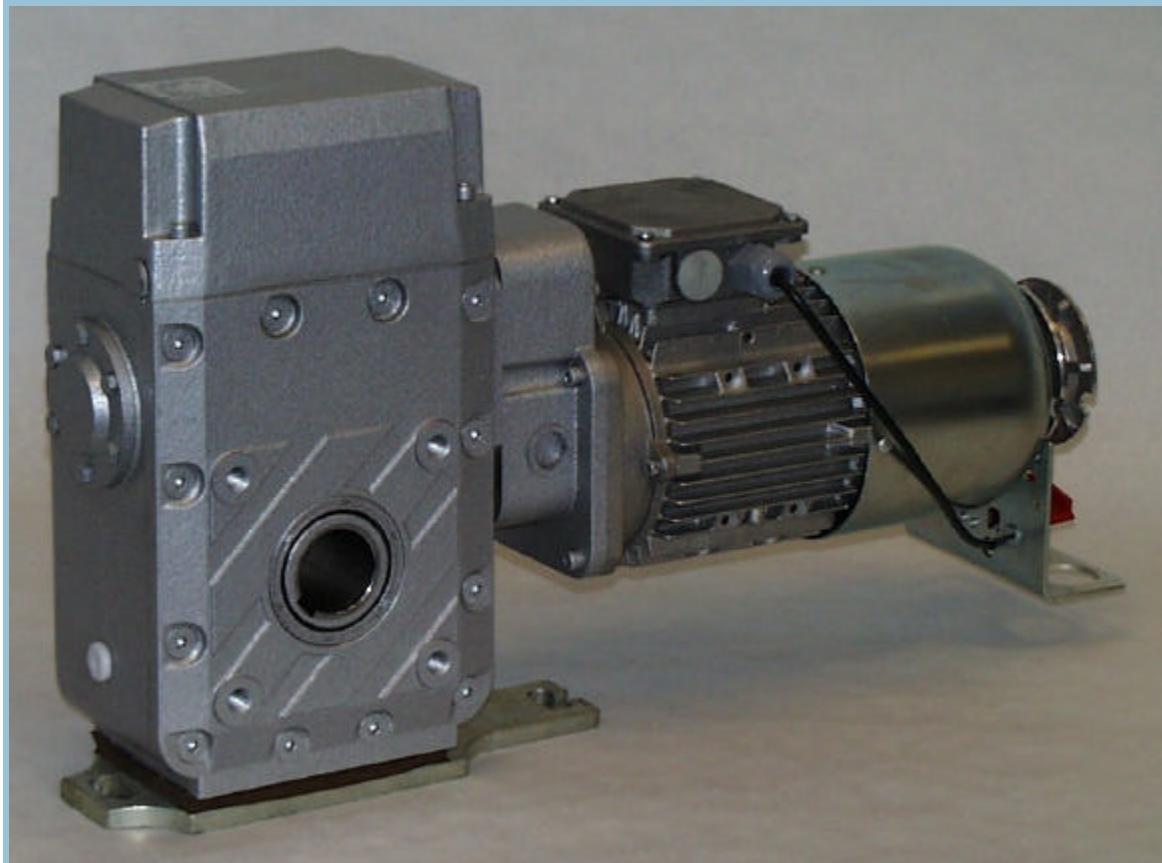

### Special Features

- \* Integral Safety Gear
- \* Hand Crank System, High Level Hand Chain System
- \* Safety Interlock Switch for Manual Operation
- \* Integral Thermal Protection
- \* I.P. 54 Environment Protection
- \* Gear Driven Limit Switches
- \* Phosphor Bronze Worm Wheel
- \* High starting Torque—Industrial Duty Motor

The TVRAD-8 Un-Sprung Rolling Door Operator is supplied with a 0.75 kw, 400v Three Phase Motor. This model can be fitted with a Hand Crank or High Level Hand Chain System which enables the roller shutter door to be manually opened & closed when required.

Data \ Type	TVRAD-8 c/w Hand Crank	TVRAD-8 c/w High Level Hand Chain	Bracket Packs
Power (kW)	0.75		
Output Speed (R.P.M.)	12		
Environmental Protection	I.P.54		
Current (Amps)	2.6		
Power Supply	400v/3ph/50Hz		
Order Code	21-0873	21-0874	29-3051

Lifting Capacities for Unsprung **STEEL LATH** Rolling Shutters (Max height 6M)

Tube Dia., mm	101	127 mm	139 mm	152 mm	168 mm
Lifting Weight, kg	560	460	420	390	355

Lifting Capacities for Unsprung **INSULATED LATH** Rolling Shutters (Max height 6M)

Tube Dia., mm	127 mm	139 mm	152 mm	168 mm	203 mm
Lifting Weight, kg	385	355	330	300	250

**OPERATOR DIMENSIONS**

TYPE:- High Level Hand Chain

