


# Link Controls Ltd.

Stuart Road, Manor Park, Runcorn, WA7 1TS  
Tel: +44(0)1928 579050 Fax: +44(0)1928 579259  
www.link-controls.co.uk sales@link-controls.co.uk

## VRFHL-50

Hazardous Area Equipment

-Suitable For Zone 1 and 2, IIB, T4 Rated Area

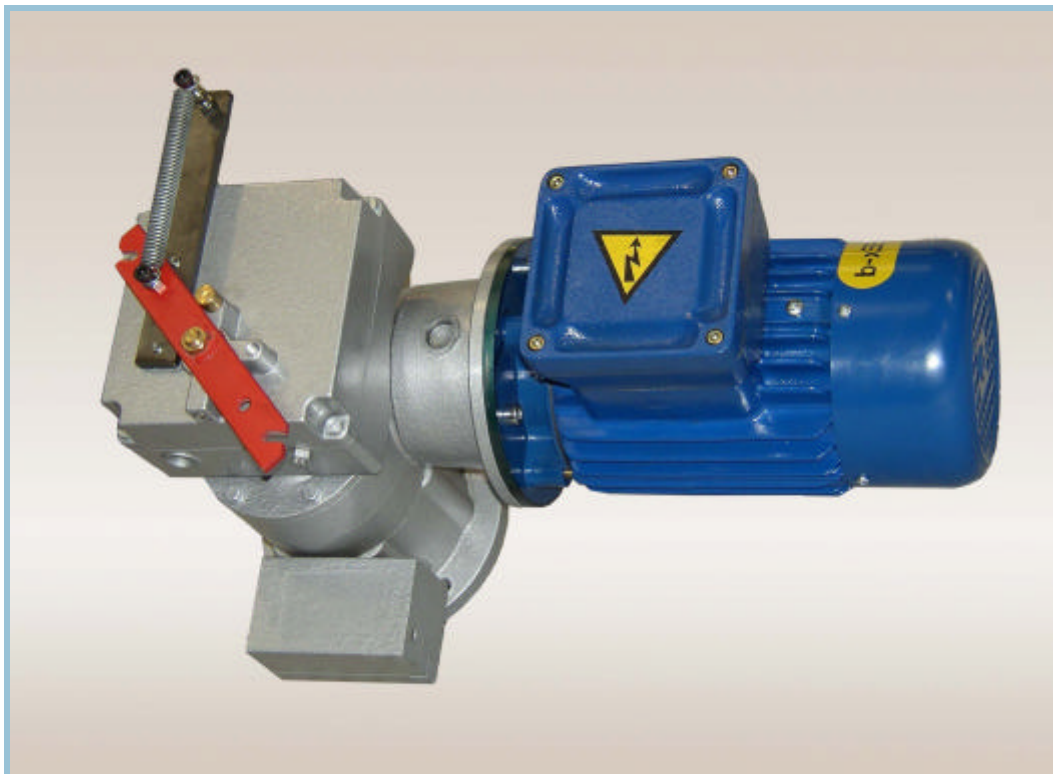

### Special Features

- \* Spring Loaded Disengage Clutch with Controlled Decent Device
- \* I.P. 54 Environment Protection
- \* Phosphor Bronze Worm Wheel
- \* High Starting Torque - Industrial Duty Motor
- \* Explosion Proof Motor
- \* Industry standard 1" Shaft
- \* Also IIC, T4 Available on Request

## PRODUCT DESCRIPTION

The VRFHL Explosion Proof Operator is available in 0.37 kw power size with 400v Three Phase Explosion Proof motor. This model uses an industrial duty motor and hence provides high starting torque. The VRFHL combines a standard flange mounted operator with an integral controlled descent device.

## TECHNICAL INFORMATION & ORDER CODES

Data \ Type	VRFHL-50
Power (kW)	0.37
Output Speed (R.P.M.)	31
Environmental Protection	I.P.54
Current (Amps)	1.1
Power Supply	400v/3ph/50Hz
Order Code	25-2910

### OPERATOR DIMENSIONS

TYPE:- VRFHL-50 EXPLOSION PROOF OPERATOR

